

Metric Conversions
MM x 0.03937 = Inches
Inches x 25.4 = MM
Grams x 0.03527 = Ounces
Ounces x 28.349527 = Grams

EAGLE ROCK[®]
TECHNOLOGIES





Wettstein Tool[™]

Grinding Accessories

No. A1-204

Woodruff Cutter Grinding Fixture

A simple grinding fixture for regrinding Woodruff Cutters with 1/2" shank. Spring stop adjusts to accommodate various cutter diameters and for the proper positioning of the cutter flutes.

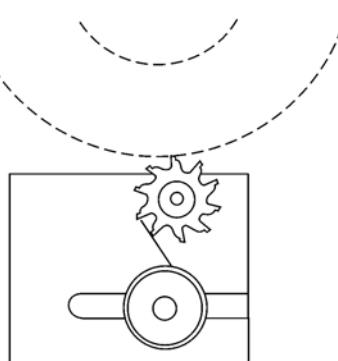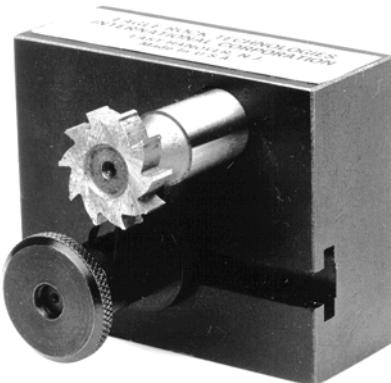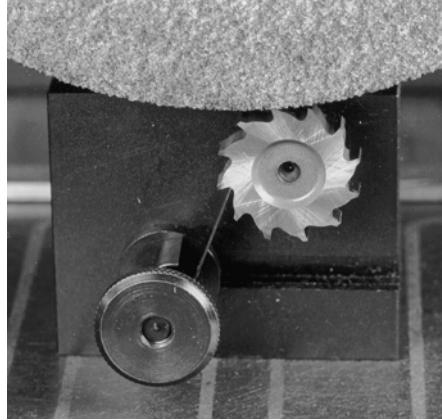

Cat. No.

Woodruff Cutter Grinding Fixture

A1-204-00



EAGLE ROCK[®]
TECHNOLOGIES INC.

Manufacturers of Specialty
Tooling and Accessories since 1963

One Eagle Rock Drive
Bath, Pennsylvania
18014-9648

1-610-759-5200 • Fax: 1-610-759-4340
1-800-EAGLEROCK • 1-800-324-5376
www.EagleRockONLINE.com

Metric Conversions
 MM x 0.03937 = Inches
 Inches x 25.4 = MM
 Grams x 0.03527 = Ounces
 Ounces x 28.349527 = Grams

EAGLE ROCK
 TECHNOLOGIES

Wettstein Tool™

Grinding Accessories

No. A1-205

Endmill and Shellmill Grinding Fixture

The original WETTSTEIN TOOL grinding fixture for regrinding Endmill and Shellmill faces on your surface grinder. Uses standard 5C Collets.

The 5C spindle indexes to accurately position the cutting edge to be ground. All angles are built into the base. Available with 15° or 36° indexing.




Primary End Relief

To grind primary end relief and center relief, place end mill in fixture and grind one flute. Then index to grind opposite flute. This will give a 5° primary end relief angle.




Center Relief Angle

This view illustrates position of wheel at start of grinding position and center relief angle 2°.




Secondary End Clearance

To grind secondary end clearance, tip fixture (as shown) using same wheel position as illustrated at left. This gives a secondary end clearance of 30°. The tool will index to allow grinding opposite tip.



Shellmill arbors on page 5-6 are required for grinding Shellmills.

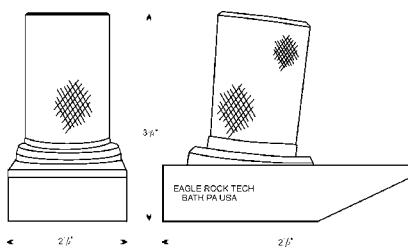

| | Flutes | Index | Cat. No |
|--------------------------|--------------|-------|-----------|
| Endmill Grinding Fixture | 2-3-4-6-8-12 | 15° | A1-205-00 |
| Endmill Grinding Fixture | 5-10 | 36° | A1-205-10 |

EAGLE ROCK
 TECHNOLOGIES INC.

One Eagle Rock Drive
 Bath, Pennsylvania
 18014-9648

Manufacturers of Specialty
 Tooling and Accessories since 1963

1-610-759-5200 • Fax: 1-610-759-4340
 1-800-EAGLEROCK • 1-800-324-5376
www.EagleRockONLINE.com

Metric Conversions
 MM x 0.03937 = Inches
 Inches x 25.4 = MM
 Grams x 0.03527 = Ounces
 Ounces x 28.349527 = Grams

EAGLE ROCK®
 TECHNOLOGIES

Wettstein Tool™



Grinding Accessories

No. A1-213

HI-LO™ Wheel Dresser

For Surface Grinders. Swings from 2" to 9" instantly. Eliminates time consuming up and down cranking of the spindle and save wear on elevating screws. Includes one premium 1/4 Karat Diamond.

Toolcrib
 Classics™

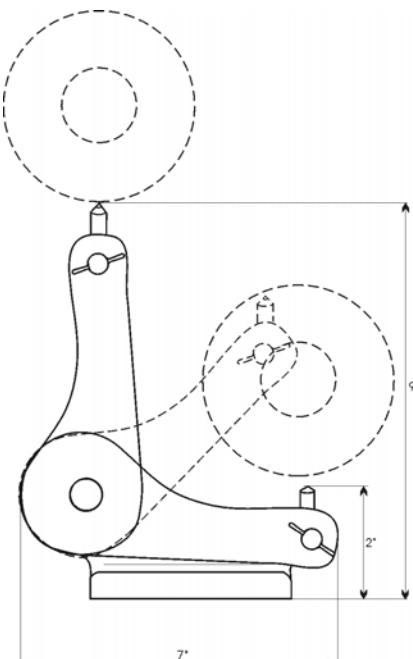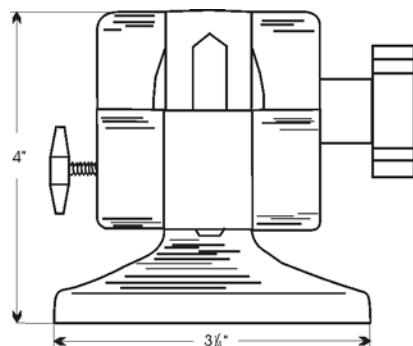

| | |
|---------------------|-----------------------|
| HI-LO Wheel Dresser | Cat. No. A1-213-00 |
|---------------------|-----------------------|

EAGLE ROCK® TECHNOLOGIES INC.

One Eagle Rock Drive
 Bath, Pennsylvania
 18014-9648

Manufacturers of Specialty
 Tooling and Accessories since 1965

1-610-759-5200 • Fax: 1-610-759-4340
 1-800-EAGLEROCK • 1-800-324-5376
www.EagleRockONLINE.com